
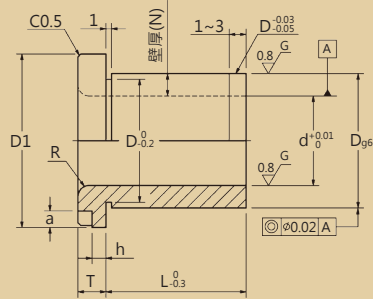


HFB045



※ Including Screws 附螺栓

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
HFB045	SUJ2 軸承鋼	Hardened 整體淬火	HRC58~	7 Working Days 7 個工作日

Size of Screws
螺栓尺寸

D1	L1	A	E	MxP (粗螺紋)	F	L2	B	h1	C
6	3	10	4	4 x 0.7	8	1.2	3	3	0.5
8	4	12	4.5	5 x 0.8	10	1.4	4	3.5	0.5


OD. TOL.
外徑公差

D	g6
10	-0.005 -0.014
12~18	-0.006 -0.017
20~30	-0.007 -0.020

Type	D	d(u:0.01mm)	L(u:0.1mm)	壁厚(N)	R	D1	T	h	a	r	螺絲位置 Y	附屬品 特殊螺栓
HFB045	10	4.00~6.50	3.0~12.0	1.75~3.00	1.0	18.0	7.5	3.0	3.0	5.5	12	M4
	12	6.00~8.50	10.0~18.0	1.75~3.00	2.0	20.0	7.5	3.0	3.0	5.5	13	M4
	15	8.00~10.50	10.0~30.0	2.25~3.50	2.0	23.0	7.5	3.0	3.0	5.5	14.5	M4
	18	10.00~12.50	10.0~30.0	2.75~4.00	2.0	26.0	7.5	3.0	3.0	5.5	16	M4
	20	12.00~13.50	12.0~35.0	3.25~4.00	2.0	28.0	9.0	4.0	3.0	7.0	18	M5
	22	12.00~13.50	12.0~35.0	4.25~5.00	2.0	30.0	9.0	4.0	3.0	7.0	19	M5
	25	13.00~15.50	12.0~35.0	4.75~6.00	2.0	33.0	9.0	4.0	3.0	7.0	20.5	M5
	26	15.00~16.50	12.0~35.0	4.75~5.50	2.0	34.0	9.0	4.0	3.0	7.0	21	M5
	30	16.00~20.50	12.0~50.0	4.75~7.00	3.0	38.0	9.0	4.0	3.0	7.0	23	M5

Order Ex. 訂購範例

HFB045-10-d-L



外徑尺寸
內徑尺寸
導套長度