




HFP060

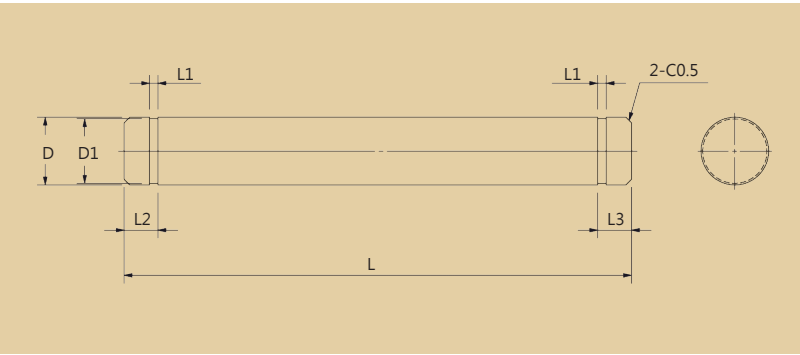

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP060-A	S45C 中碳鋼	Blackening 染黑	8 Working Days 8 個工作日
HFP060-B		Nickel Electroless 鍍無電解鍍	
HFP060-C	SUS304 不鏽鋼	-	


Choose Tolerance of Outsize Diameter 選擇外徑公差			
	I	II	III
D	h9	h7	g6
6	0 -0.030	0 -0.012	-0.004 -0.012
8 · 10	0 -0.036	0 -0.015	-0.005 -0.014
12~18	0 -0.043	0 -0.018	-0.006 -0.017
20~30	0 -0.052	0 -0.021	-0.007 -0.020
35~50	0 -0.062	0 -0.025	-0.009 -0.025

Tolerance of Length 長度公差	
L	TOL.
2~6	±0.1
7~30	±0.2
31~120	±0.3
121~400	±0.5
401~800	±0.8

Type	D	L(u:0.1mm)	L2 · L3(u:1mm)	L1
HFP060-A	6	20.0~300.0	2≤L2, L3<L/2	0.7
	8	20.0~400.0	3≤L2, L3<L/2	0.9
	10	25.0~500.0	3≤L2, L3<L/2	0.9
	12	40.0~600.0	4≤L2, L3<L/2	1.15
HFP060-B	15	50.0~700.0	4≤L2, L3<L/2	1.15
	20	70.0~800.0	4≤L2, L3<L/2	1.35
HFP060-C	25	80.0~800.0	5≤L2, L3<L/2	1.35
	30	80.0~800.0	5≤L2, L3<L/2	1.65
	35	80.0~800.0	5≤L2, L3<L/2	1.65
	40	80.0~800.0	5≤L2, L3<L/2	1.9
	50	100.0~800.0	5≤L2, L3<L/2	1.9

Order Ex. 訂購範例

HFP060-□-6-L-L2-L3-□



選擇材質
外徑尺寸
選擇旋轉軸長度
扣環距離
扣環距離
選擇公差

Alterations	追加工名稱	Description	加工說明	Order Ex. 訂購範例
B		Adds wrench flats 單扳手槽或雙扳手槽加工		HFP060-A-6-100-10-10-I-B or 2B Wrench flats at one or two locations 單扳手槽或雙扳手槽
C		Adds set screw flat 單平面或雙平面加工		HFP060-A-6-100-10-10-I-C or 2C Adds set screw flats at one or two locations 單平面或雙平面追加
F		Adds key grooves 單鍵槽或雙鍵槽加工		HFP060-A-6-100-10-10-I-F or 2F Key grooves at one or two locations 單鍵槽或雙鍵槽加工
M		Slit cam grooves 開縫凸輪用溝槽加工		HFP060-A-6-100-10-10-I-M Slit cam grooves 開縫凸輪用溝槽加工