


Cantilever Pins-For Tension-Screw Mount Type

懸臂銷-張力輪用-螺栓固定型

HFP125

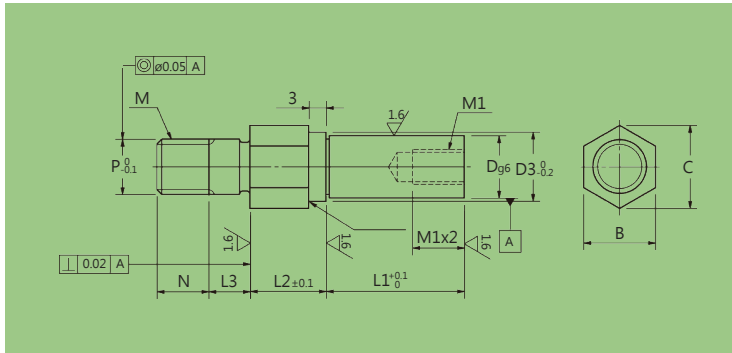


Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP125-A	S45C 中碳鋼	Nickel Electroless 鍍無電解鎳	7 Working Days 7 個工作日
HFP125-B	SUS304 不鏽鋼	-	

OD. TOL. 外徑公差	
D	g6
6	-0.004 -0.012
8~10	-0.005 -0.014
12~18	-0.006 -0.017
20~30	-0.007 -0.020

Type	D	L1(u:1mm)	L2(u:1mm)	L3(u:1mm)	N	M1	P	M	D3	B	C
HFP125-A HFP125-B	6	5~100	5~60	5~10	6~12	3	6	M6	8	10	11.5
	8	5~100	5~60	5~10	8~16	4	8	M8	10	12	13.9
	10	5~100	5~60	5~10	10~20	4/5/6	10	M10	13	14	16.2
	12	10~120	5~60	5~15	12~24	5/6/8	12	M12	15	17	19.6
	13	10~120	5~60	5~15	12~24	5/6/8	12	M12	16	17	19.6
	15	10~120	5~60	5~15	12~24	6/8/10	12	M12	18	19	21.9
	16	10~120	5~60	5~15	12~24	6/8/10	12	M12	19	19	21.9
	17	10~120	5~75	5~20	12~24	6/8/10	12	M12	20	22	27.5
	18	10~120	5~75	5~20	12~24	6/8/10	12	M12	21	24	27.7
	20	10~120	5~75	5~20	20~40	6/8/10/12	20	M20	24	27	31.2
	20A	10~120	5~75	5~20	20~40	6/8/10/12	16	M16	24	27	31.2
	22	10~120	5~75	5~20	20~40	6/8/10/12	20	M20	26	27	31.2
	22A	10~120	5~75	5~20	20~40	6/8/10/12	16	M16	26	27	31.2
	25	10~120	5~75	5~20	20~40	8/10/12/16	20	M20	29	30	34.6
	25A	10~120	5~75	5~20	20~40	8/10/12/16	16	M16	29	30	34.6
	30	10~120	5~75	5~20	20~40	8/10/12/16/20	20	M20	34	34	41.6
	30A	10~120	5~75	5~20	20~40	8/10/12/16/20	16	M16	34	34	41.6

Order Ex. 訂購範例

HFP125-□6-L1-L2-L3-N-M1

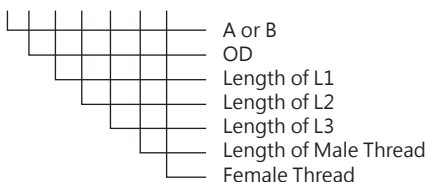

選擇材質和表面處理
外徑尺寸
L1長度
L2長度
L3長度
外牙長度
內牙

※ u=unit

Visit us : www.hdw.com.tw
Contact : headway@hdw.com.tw