


HFA010

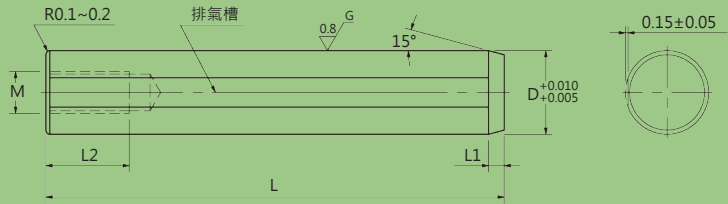

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Delivery 交貨日
HFA010-A	SUJ2(1.3505) 軸承鋼	Hardened 整體淬火	HRC58~	3 Working Days 3 個工作日
HFA010-B	SUS440C(1.4125) 不鏽鋼			
HFA010-C	SUS304 不鏽鋼	-	-	

Type	M	D	L(A Type)	L(B Type)	L(C Type)	L1	L2
HFA010-A	3x0.5	5	10/15/20/25/30	10/15/20	10/15/20/25/30	1.5	6
	4x0.7	6	10/15/20/25/30/35/40/50	15/20/25/30	10/15/20/25/30/35/40	2	8
HFA010-B	5x0.8	8	15/20/25/30/35/40/45/50/60/70/80	15/20/25/30/35/40	15/20/25/30/35/40/45/50	2	8
HFA010-C	6x1.0	10	15/20/25/30/35/40/45/50/60/70/80	20/25/30/35/40/45/50/60	-	2.5	10
HFA010-C	6x1.0	12	20/30/40/50/60/70/80	30/40/50/60	-	2.5	10
	8x1.25	13	40/50/60/70/80	30/40/50/60	-	2.5	15
	8x1.25	16	40/50/60/70	-	-	3.0	15

Order Ex. 訂購範例

HFA010-5-□-L



外徑尺寸
選擇定位銷材質
定位銷長度