


Bushing For Locating Pin-Locate and Set Type

定位銷用襯套-定位止迴型

HFB048

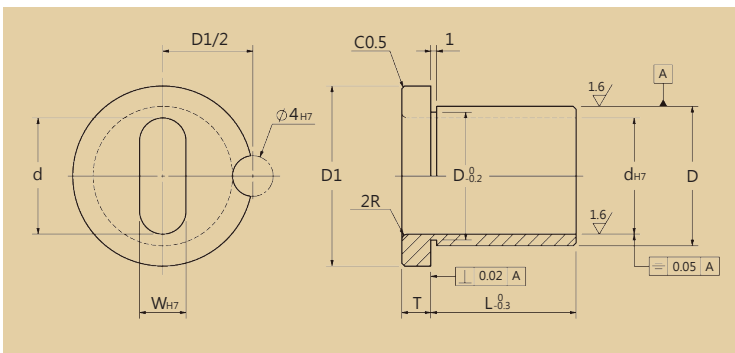

Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Surface Treatment 表面處理	Delivery 交貨日
HFB048-A	SUJ2 軸承鋼	Hardened 整體淬火	HRC58~	-	7 Working Days 7 個工作日
HFB048-B				Nickel Electroless 鍍無電解鎳	


ID. TOL. 內徑公差	
d	H7
4~5.99	+0.012 0
6~9.99	+0.015 0
10~17.99	+0.018 0
18~25	+0.021 0

Choose Tolerance of Outsize Diameter 選擇外徑公差		
	I	II
D	p6	m6
10	+0.024 +0.015	+0.015 +0.006
12~16	+0.029 +0.018	+0.018 +0.007
20~30	+0.035 +0.022	+0.021 +0.008
35	+0.042 +0.026	+0.025 +0.009

Type	D	dH7(u:0.01mm)	WH7(u:0.01mm)	L(u:1mm)	T	D1
HFB048-A HFB048-B	10	4.00~8.00	3.00≤W<d	8~40 L+T≤dx3	3	14
	12	4.00~10.00			3	16
	16	8.00~14.00			3	20
	20	10.00~18.00			3	26
	25	13.00~22.00			5	30
	30	16.00~25.00			5	35
	35	18.00~25.00			5	40

Order Ex. 訂購範例

HFB048-□-10-d-W-L-□



A or B
OD
Long Size of Oval Shape
Short Size of Oval Shape
Length of Bushing
I or II

選擇材質和表面處理
外徑尺寸
長圓孔的長邊
長圓孔的短邊
導套長度
選擇公差

※ u=unit

Visit us : www.hdw.com.tw
Contact : headway@hdw.com.tw