




HFP083

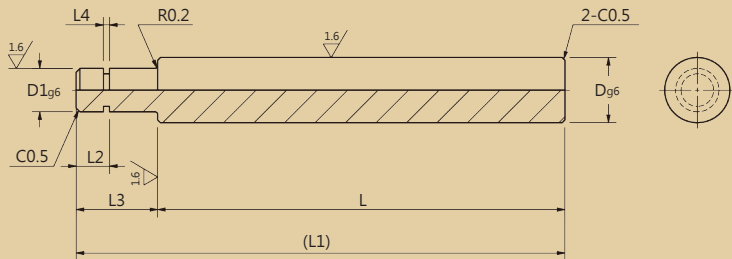


Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP083-A	S45C 中碳鋼	Blackening 染黑	8 Working Days 8 個工作日
HFP083-B		Nickel Electroless 鍍無電解鎳	
HFP083-C	SUS304 不鏽鋼	-	

OD. TOL. 外徑公差	
D	g6
6	-0.004 -0.012
8・10	-0.005 -0.014
12~17	-0.006 -0.017
18~30	-0.007 -0.020
35~50	-0.009 -0.025

Type	D	D1(u:1mm)	L(u:0.1mm)	L2(u:1mm)	L3(u:0.1mm)	L1
HFP083-A HFP083-B HFP083-C	6	3/4/5	20.0~298.0	D1≤6時 2≤L2	L3≤D1x5	300
	8	3≤D1<D	20.0~398.0		L3≤D1x5	400
	10	3≤D1<D	20.0~498.0		L3≤D1x5	500
	12	5≤D1<D	25.0~598.0		L3≤D1x5	600
	13	5≤D1<D	25.0~598.0		L3≤D1x5	600
	15	5≤D1<D	25.0~698.0		L3≤D1x5	700
	16	5≤D1<D	25.0~798.0	6<D1≤10時 3≤L2	L3≤D1x5	800
	17	5≤D1<D	30.0~798.0		L3≤D1x5	800
	18	5≤D1<D	30.0~798.0		L3≤D1x5	800
	20	5≤D1<D	30.0~798.0	10<D1≤20時 4≤L2	L3≤D1x5	800
	22	10≤D1<D	30.0~798.0		L3≤D1x5	800
	25	10≤D1<D	30.0~798.0	20<D1時 5≤L2	L3≤D1x5	800
	30	10≤D1<D	30.0~798.0		L3≤D1x5	800
	35	16≤D1<D	40.0~798.0		L3≤D1x5	800
	40	16≤D1<D	40.0~798.0		L3≤D1x5	800
	50	16≤D1<D	40.0~798.0		L3≤D1x5	800

Order Ex. 訂購範例

HFP083-□-6-D1-L-L2-L3



A B or C
OD
The Diameter of Stepped
Length of Rotary Shafts
The Distance of Ring Grooves
Length of Shaft-neck

選擇材質
外徑尺寸
軸頸外徑
選擇旋轉軸長度
扣環距離
軸頸長度

Alterations	追加工名稱	Description 加工說明	Order Ex. 訂購範例
A		Length tolerance change 長度公差變更	HFP083-A-6-5-100-5-10-A(±0.03) Length tolerance change to ±0.03 長度公差變更為±0.03
C		Adds set screw flat 單平面或雙平面加工	HFP083-A-6-5-100-5-10-C or 2C Adds set screw flats at one or two locations 單平面或雙平面追加
F		Adds key grooves 單鍵槽或雙鍵槽加工	HFP083-A-6-5-100-5-10-F or 2F Key grooves at one or two locations 單鍵槽或雙鍵槽加工
M		Slit cam grooves 開縫凸輪用溝槽加工	HFP083-A-6-5-100-5-10-M Slit cam grooves 開縫凸輪用溝槽加工