
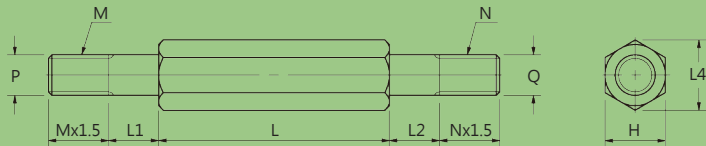


HFP048

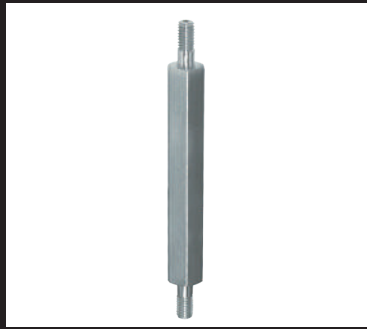


Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP048-A	1015 低碳鋼	-	5 Working Days 5 個工作日
HFP048-B		Blackening 染黑	
HFP048-C		Nickel Electroless 鍍無電解鎳	
HFP048-D	SUS304 不鏽鋼	-	

L(mm)	TOL.公差 (mm)
<300	±0.2
<600	±0.3
<800	±0.4

Type	H	L(u:0.5mm)	L1(u:1mm)	L2(u:1mm)	M=P&N=Q	L4
HFP048-A HFP048-B HFP048-C HFP048-D	8	20~250	2~4	2~4	3/4/5	9.2
	10	20~350	2~5	2~5	4/5/6	11.5
	12	25~400	2~6	2~6	5/6/8	13.9
	13	25~400	2~6	2~6	5/6/8	15
	14	30~500	2~8	2~8	6/8/10	16.2
	17	30~500	2~8	2~8	6/8/10	19.6
	19	45~500	2~10	2~10	6/8/10/12	21.9
	24	55~600	2~12	2~12	6/8/10/12/16	27.7
	27	55~600	2~16	2~16	6/8/10/12/16/20	31.2
	30	65~600	2~16	2~16	6/8/10/12/16/20/24	34.6
	32	65~600	2~20	2~20	6/8/10/12/16/20/24	36.9

Order Ex. 訂購範例

HFP048-□-8-L-L1-L2-M-N



A B C or D
Opposite Length of Hexagonal Post
Length of Hexagonal Post
Length of Stepped
Length of Stepped
Choose M (Thread)
Choose N (Thread)

選擇六角柱材質
六角柱對邊長度
六角柱長度
嵌入部長度
嵌入部長度
選擇螺紋M
選擇螺紋N

Alterations	追加加工名稱	Description	加工說明	Order Ex.	訂購範例
A		Length tolerance change 長度公差變更		HFP048-A-8-100-2-2-M3-N3-A(±0.03) Length tolerance change to ±0.03 長度公差變更為±0.03	