
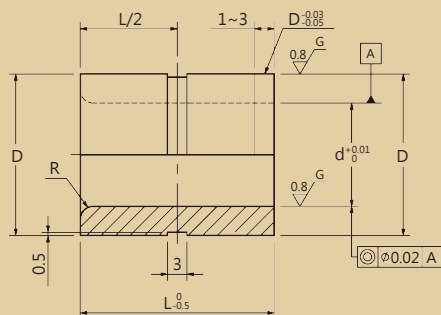


HFB043




Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Surface Treatment 表面處理	Delivery 交貨日
HFB043-A	SUJ2 軸承鋼	Hardened 整體淬火	HRC58~	-	7 Working Days 7 個工作日
HFB043-B				Blackening 染黑	
HFB043-C				Nickel Electroless 鍍無電解鎳	
HFB043-D	SUS304 不鏽鋼		-		
HFB043-E	SUS440C 不鏽鋼		HRC50~55		

Type	D	d(u:0.01mm)	L(u:0.1mm)	R
HFB043-A HFB043-B HFB043-C	8	4.00~4.50	10.0~13.0	1.0
	10	4.00~6.50	10.0~20.0	1.0
	12	6.00~8.50	10.0~20.0	2.0
	15	8.00~10.50	10.0~40.0	2.0
	18	10.00~12.50	10.0~40.0	2.0
	20	12.00~13.50	10.0~40.0	2.0
	22	12.00~13.50	10.0~40.0	2.0
	25	13.00~15.50	10.0~40.0	2.0
	26	15.00~16.50	10.0~40.0	2.0
	30	16.00~20.50	12.0~60.0	3.0
	35	20.00~25.00	12.0~60.0	3.0

Choose Tolerance of Outsize Diameter 選擇外徑公差		
	I	II
D	p6	m6
8~10	+0.024 +0.015	+0.015 +0.006
12~18	+0.029 +0.018	+0.018 +0.007
20~30	+0.035 +0.022	+0.021 +0.008
35	+0.042 +0.026	+0.025 +0.009

Order Ex. 訂購範例

HFB043-□-8-d-L-□



A B C D or E
OD.
ID.
Length of Bushing
I or II

選擇材質和表面處理
外徑尺寸
內徑尺寸
導套長度
選擇公差