
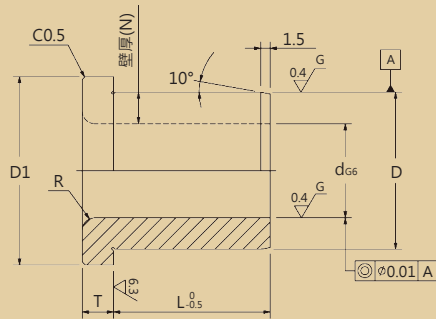


HFB041



Type 品名	Material 材質	Heat Treatment 熱處理	Hardness 硬度	Surface Treatment 表面處理	Delivery 交貨日
HFB041-A	SUJ2 軸承鋼	Hardened 整體淬火	HRC58~	-	7 Working Days 7個工作日
HFB041-B				Nickel Electroless 鍍無電解鎳	
HFB041-C	SUS440C 不鏽鋼		HRC50~55	-	

Type	d	TOL.	L	壁厚 (N)	R	D1	T	D
HFB041-A HFB041-B HFB041-C	2	+0.008 +0.002	5/6/8/10/12	1.5	0.8	9	2.5	5
	3	+0.008 +0.002	5/6/8/10/12	2	0.8	11	2.5	7
	4	+0.012 +0.004	5/6/8/10/12/15/16/20	2	1	12	3	8
	5	+0.012 +0.004	5/6/8/10/12/15/16/20	2.5	1	14	3	10
	6	+0.012 +0.004	5/6/8/10/12/15/16/20/25	2	1	14	3	10
	8	+0.014 +0.005	5/6/8/10/12/15/16/20/25	2	2	16	4	12
	10	+0.014 +0.005	6/8/10/12/15/16/20/25	2.5	2	19	4	15
	12	+0.017 +0.006	8/10/12/15/16/20/25/30	3	2	22	4	18
	13	+0.017 +0.006	10/12/15/16/20/25/30	4.5	2	26	5	22
	15	+0.017 +0.006	10/12/15/16/20/25/30	5	2	30	5	25
	16	+0.017 +0.006	10/12/15/16/20/25/30	5	2	30	5	26
	20	+0.020 +0.007	12/15/16/20/25/30	5	3	35	6	30
	25	+0.020 +0.007	16/20/25/30/35	5	3	40	6	35

Choose Tolerance of Outsize Diameter 選擇外徑公差		
	I	II
D	p6	m6
5	+0.020 +0.012	+0.012 +0.004
7~10	+0.024 +0.015	+0.015 +0.006
12~18	+0.029 +0.018	+0.018 +0.007
22~30	+0.035 +0.022	+0.021 +0.008
35	+0.042 +0.026	+0.025 +0.009

Order Ex. 訂購範例

HFB041-□-2-L-□



A B or C
ID.
Length of Bushing
I or II

選擇材質和表面處理
內徑尺寸
導套長度
選擇公差