


HFA005

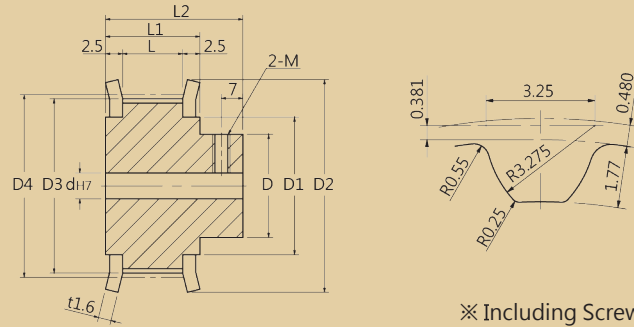

※ Including Screws 附螺栓

Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA005-A	Aluminium 鋁合金	Anodizing 白色陽極	5 Working Days 5 個工作日
HFA005-B		Black Anodizing 黑色陽極	
HFA005-C		Hard Anodizing 硬質陽極	
HFA005-D		Nickel Electroless 無電解鍍	
HFA005-E	S45C 中碳鋼	-	
HFA005-F		Blackening 染黑	
HFA005-G		Nickel Electroless 無電解鍍	

The Tapped Hole Dimensions 螺紋孔尺寸表	
d	M
5	3
6~12	4
13~17	5
18~30	6
31~45	8
46~65	10
※ Apply for Hole Alteration II、III 適用於II、III加工服務	


Hole Alteration 孔加工服務	I Hole 孔	II Hole+Tap 圓孔+攻牙	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 軸頸孔-軸轂側沉頭孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(II) (u:1mm)	d(III) (u:1mm)	d(IV&V) (u:1mm)	d1(IV&V) (u:1mm)	L3(IV&V) (u:1mm)	Belt Width 皮帶寬度 (L/L1/L2)	D	D1	D2	D3	D4
HFA005-A HFA005-B HFA005-C HFA005-D HFA005-E HFA005-F HFA005-G	14	5~10	5~8	-	5/6	7/8	2≤L3≤L2-2	10mm 11/16/28	14	16	26	21.32	22.28
	15	5~10	5~8	-	5~8	7~10			15	18	28	22.91	23.87
	16	5~12	5~10	8	5~10	7~12			17	20	32	24.50	25.46
	18	6~14	6~11	8/10	6~12	8~14			19	22	33	27.69	28.65
	19	6~15	6~11	8/10	6~13	8~15			19	24	36	29.28	30.24
	20	6~15	6~11	8/10	6~13	8~15			19	24	36	30.87	31.83
	22	7~19	7~15	8~12	7~17	9~19			24	27	40	34.05	35.01
	24	7~22	7~17	8~13	7~20	9~23			27	30	45	37.24	38.20
	25	7~22	7~17	8~15	7~20	9~23		15mm 17/22/34	27	30	45	38.83	39.79
	26	8~27	8~21	8~17	8~25	10~27			31	35	48	40.42	41.38
	28	8~27	8~22	8~18	8~25	10~27			32	35	48	43.60	44.56
	30	10~28	10~23	10~18	10~26	12~28			33	36	52	46.79	47.75
	32	10~32	10~27	10~22	10~30	12~32			37	40	55	49.97	50.93
	34	10~36	10~30	10~25	10~34	12~36			40	45	61	53.15	54.11
	36	10~36	10~30	10~25	10~34	12~36			40	45	61	56.34	57.30
	40	10~42	10~35	10~28	10~40	12~42			47	50	67	62.70	63.66
	44	12~46	12~38	12~32	12~44	14~46		25mm 27/32/44	50	58	74	69.07	70.03
	48	12~55	12~45	12~40	12~53	14~55			60	63	83	75.43	76.39
	50	12~59	12~45	12~43	12~57	14~59			63	67	87	78.62	79.58
	60	12~71	12~45	12~45	12~69	14~71			75	80	99	94.53	95.49
	72	12~80	12~65	12~50	12~80	14~86			90	100	119	113.63	114.59

※ u=unit

Order Ex. 訂購範例

HFA005-□-14-□-d-(d1)-□-(L3)-S5M-B



A B C D E F or G
Teeth
I II III IV or V
Internal Diameter of Hole
Internal Diameter of Hole(IV&V Type)
Width of Timing Pulley(10/15/25mm)
Length of Hole(IV&V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/II/III/IV/V)
軸孔內徑
軸孔內徑(適用於IV&V型)
皮帶輪寬度(10/15/25mm)
軸孔長度(適用於IV&V型)

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA005-A-14-I-5-10-S5M-B-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA005-A-14-I-5-10-S5M-B-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA005-A-14-I-5-10-S5M-B-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接		HFA005-A-14-I-5-10-S5M-B-R Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割		HFA005-A-14-I-5-10-S5M-B-S Flange Cut 法蘭切割
T		Tapped Hole Dimensions 牙孔尺寸變更		HFA005-A-14-I-5-10-S5M-B-T Tapped Hole Dimensions Change 牙孔尺寸變更

※ u=unit