


HFP105

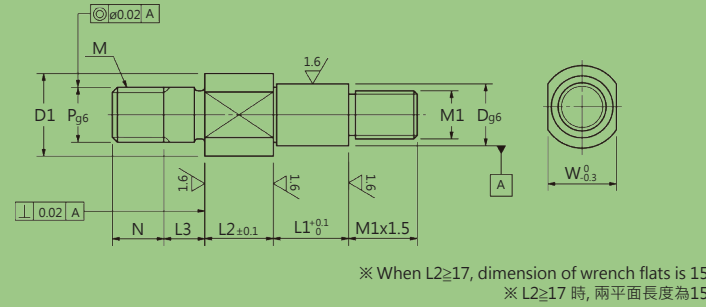


Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFP105-A	S45C 中碳鋼	Blackening 染黑	7 Working Days 7 個工作日
HFP105-B		Nickel Electroless 鍍無電解鎳	

OD. TOL. 外徑公差	
D	g6
3	-0.002 -0.008
4~6	-0.004 -0.012
8~10	-0.005 -0.014
12~18	-0.006 -0.017
20~30	-0.007 -0.020

Type	D	L1(u:1mm)	L2(u:1mm)	L3(u:1mm)	N(u:1mm)	M1	P	M	D1	W
HFP105-A HFP105-B	3	3~100	2~30	3~8	3~6	3	3	M3	7	5
	4	3~100	2~30	3~8	4~8	3/4	4	M4	8	6
	5	3~100	2~30	3~8	5~10	3/4/5	5	M5	9	7
	6	5~100	2~60	5~10	6~12	4/5/6	6	M6	10	8
	8	5~100	2~60	5~10	8~16	5/6/8	8	M8	12	10
	10	5~100	2~60	5~10	10~20	6/8/10	10	M10	15	13
	12	10~120	2~60	5~15	12~24	6/8/10/12	12	M12	17	14
	13	10~120	2~60	5~15	12~24	6/8/10/12	12	M12	18	15
	15	10~120	2~60	5~15	12~24	8/10/12	12	M12	20	17
	16	10~120	2~60	5~15	12~24	8/10/12	12	M12	21	18
	17	10~120	2~60	5~20	12~24	10/12/16	12	M12	23	20
	18	10~120	2~60	5~20	12~24	10/12/16	12	M12	23	20
	20	10~120	4~60	5~20	20~40	10/12/16/20	20	M20	26	24
	20A	10~120	4~60	5~20	20~40	10/12/16/20	16	M16	26	24
	22	10~120	4~60	5~20	20~40	10/12/16/20	20	M20	28	25
	22A	10~120	4~60	5~20	20~40	10/12/16/20	16	M16	28	25
	25	10~120	4~60	5~20	20~40	10/12/16/20/24	20	M20	31	27
	25A	10~120	4~60	5~20	20~40	10/12/16/20/24	16	M16	31	27
	30	10~120	4~60	5~20	20~40	12/16/20/24/30	20	M20	36	32
	30A	10~120	4~60	5~20	20~40	12/16/20/24/30	16	M16	36	32

Order Ex. 訂購範例

HFP105-□-3-L1-L2-L3-N-M1



- A or B
- OD
- Length of L1
- Length of L2
- Length of L3
- Length of Thread
- Male Thread

選擇材質和表面處理
外徑尺寸
L1長度
L2長度
L3長度
外牙長度
外牙