


HFA041

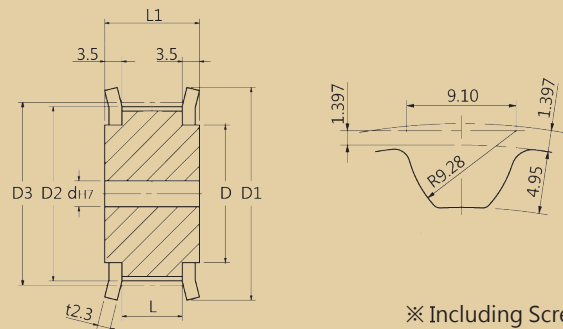

※ Including Screws 附螺栓


Type 品名	Material 材質	Surface Treatment 表面處理	Delivery 交貨日
HFA041-A	S45C 中碳鋼	-	8 Working Days 8 個工作日
HFA041-B		Blackening 染黑	

Hole Alteration 孔加工服務	I Hole 孔	III Keyway+Tap 鍵槽孔+攻牙	IV Stepped Hole 軸頸孔	V Both Ends Stepped Hole 雙邊軸頸孔	VI Keyway+Stepped Hole 鍵槽孔+軸頸孔	※ keyway Dimension Please Refer Page 199 ※ 鍵槽加工尺寸表請參考 第199頁

Type	Teeth	d(I) (u:1mm)	d(III&VI) (u:1mm)	d(IV&V) (u:1mm)	d1(IV&VI) (u:1mm)	d(V) (u:1mm)	d2&d3(V) (u:1mm)	L2(IV&VI) (u:1mm)	L3&L4(V) (u:1mm)	Belt Width 皮帶寬度 (L/L1)	D	D1	D2	D3
HFA041-A HFA041-B	28	30~70	30~70	30~66	30~70	30~66	35~75	5≤L2≤L1-5	5~23	40mm 46/53	101	136	121.98	124.78
	30	30~80	30~70	30~76	30~80	30~76	35~85				111	144	130.90	133.69
	32	30~85	30~70	30~81	30~85	30~81	35~90				121	152	139.81	142.60
	34	30~90	30~70	30~86	30~90	30~86	35~95				131	161	148.72	151.52
	36	30~95	30~70	30~91	30~95	30~91	35~100				141	172	157.63	160.43
	40	35~105	35~70	35~101	35~105	35~101	40~110				161	190	175.46	178.25
	42	35~110	35~70	35~106	35~110	35~106	40~115			60mm 67/74	164	200	184.37	187.17
	44	35~115	35~70	35~111	35~115	35~111	40~120				173	208	193.28	196.08
	48	40~120	40~70	40~116	40~120	40~116	45~125				190	224	211.11	213.90
	50	40~130	40~70	40~126	40~130	40~126	45~135				200	235	220.02	222.82
	56	40~150	40~70	40~146	40~150	40~146	45~155				224	260	246.76	249.55

Order Ex. 訂購範例

HFA041-□-28-□-d-(d1-d2-d3)-□-(L2-L3-L4)-S14M-A



A or B
Teeth
I III IV V or VI
Internal Diameter of Hole
Internal Diameter of Hole(IV Type)
Internal Diameter of Hole(V Type)
Internal Diameter of Hole(V Type)
Width of Timing Pulley(40/60mm)
Length of Hole(IV Type)
Length of Hole(V Type)
Length of Hole(V Type)

選擇皮帶輪材質及表面處理方式
齒數
選擇孔加工類型(I/III/IV/V/VI)
軸孔內徑
軸孔內徑(適用於IV型)
軸孔內徑(適用於V型)
軸孔內徑(適用於V型)
皮帶輪寬度(40/60mm)
軸孔長度(適用於IV型)
軸孔長度(適用於V型)
軸孔長度(適用於V型)

Alterations	追加加工名稱	Description	加工說明	Order Ex. 訂購範例
O		Set Screw Angle 變更止迴螺絲角度		HFA041-A-28-I-30-40-S14M-A-O Set Screw Angle Change From 120° to 90° 止迴螺絲角度從120°變更為90°
P		Side Tapped Hole(3/4/6) 側面攻牙孔加工(3/4/6孔)		HFA041-A-28-I-30-40-S14M-A-P3 Side Tapped 3 Holes 側面攻牙孔加工(3孔)
Q		Side Through Hole(3/4/6) 側面貫穿孔加工(3/4/6孔)		HFA041-A-28-I-30-40-S14M-A-Q4 Side Through 4 Holes 側面貫穿孔加工(4孔)
R		Flange not Attached 法蘭不鉚接		HFA041-A-28-I-30-40-S14M-A-R Flange not Attached 法蘭不鉚接
S		Flange Cut 法蘭切割		HFA041-A-28-I-30-40-S14M-A-S Flange Cut 法蘭切割